




LIDA® One Anodes

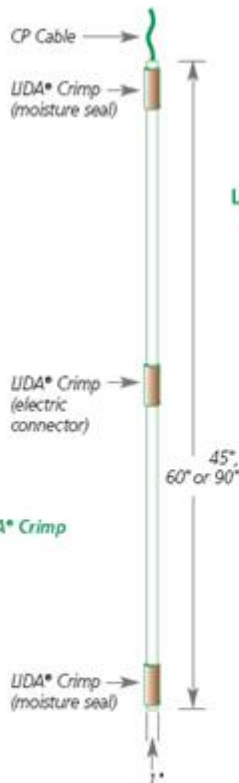

The "Single Anode" Concept from De Nora Elettrodi Network — One anode, One cable — It's that simple.

The LIDA® One anodes are the newest in the family of mixed metal oxide anode products specifically tailored to the cathodic protection of buried structures. Designed for installations where a single anode on a string is preferred for groundbeds with widely varying soil resistivities, the mixed metal oxide coating is specially formulated for use in carbonaceous backfill.

LIDA® One is a 1" diameter titanium tube with a precious metal oxide coating. This mixed metal oxide is a crystalline, electrically-conductive coating that activates the titanium and enables it to function as an anode. When applied on titanium, the coating has an extremely low consumption rate, measured in terms of milligrams per year. As a result of this low consumption rate, the tubular dimensions remain nearly constant during the design life of the anode — providing a consistently low resistance anode.



DE NORA ELETTRODI NETWORK
GRUPPO DE NORA

De Nora do Brasil LTDA.
AV. Jerome Case, 1959 - Eden
18087-220 Sorocaba (SP)
fone 55 15 2101 4450
fax 55 15 2101 4451
denorabrasil@denora.com

www.lidaproducts.com

Protech Business Unit

By increasing the length of our tubular anode, yet reducing total current output, De Nora Elettrodi Network has created another reliable mixed metal oxide anode product line with even greater cost savings over competitive anode technologies. As with all of De Nora Elettrodi mixed metal oxide tubular anodes, the combination of a tough and lightweight product, its ease of handling and installation, the superior mechanical connection, and our five year, no hassle warranty, makes LIDA® One the ONE anode for unparalleled CP performance.

FEATURES

- Designed to be used as a single anode
- Durable — no breakage or damage while getting it to the job site
- Special crimped moisture seal to prevent damage to electrical connection
- No lead — no epoxy potting compounds
- Five Year Product Warranty

Please contact us when operation is expected in waters below 5° C.








LIDA® One Anodes

Maximum Current for LIDA® One Anodes (life in years)

- LIDA One 1 x 45"
- LIDA One 1 x 60"
- LIDA One 1 x 90"

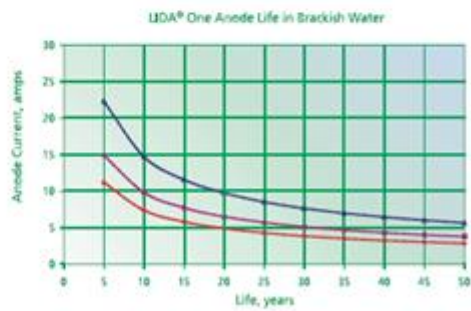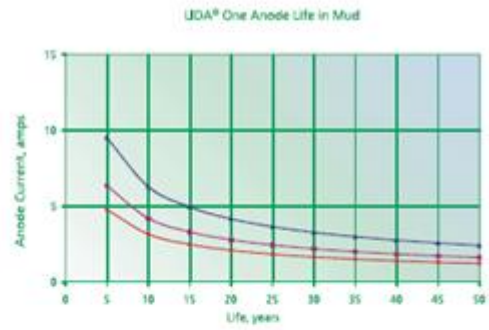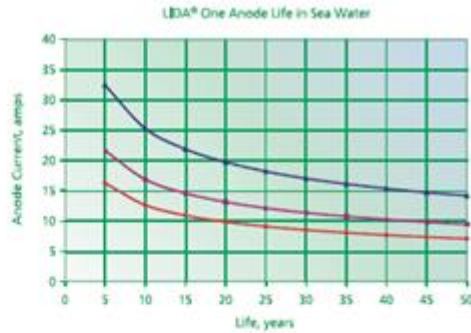

*In chloride rich soils or muds, a suitable chlorine resistant cable must be used with the anodes.
Please contact us when operation is expected in waters below 5° C.*