

CATHODIC PROTECTION


VOLTMETERS

MODEL CPV-2

- 10 MΩ Impedance
- Swing Needle Meter
- "AA" Batteries
- Filter AC Interference
- 0 - 2 volts DC scale
- Color Code display

Use for potential reads:

- Anode to Structure
- Structure to Structure
- Insulated Flanges
- Structure to Earth

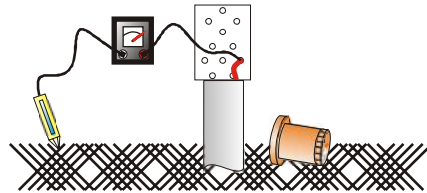

Both instruments come complete with:


- Instrument with battery
- Heavy Duty coiled cables with clamps
- Model 6-A Half Cell electrode
- Convenient carrying case

MODEL CPV-4

- 11 MΩ Impedance
- LCD Digital Meter
- 9 volt Battery
- Filter AC Interference
- 2 volt and 20 volt DC scale
- Meter displays + (POS) or - (NEG) reads

Use for potential reads:

- Anode to Structure
- Insulated Flanges
- Structure to Structure
- Structure to Earth

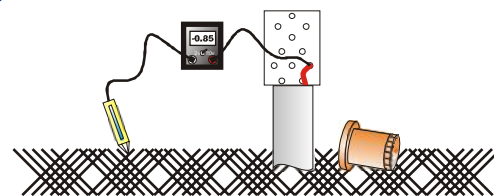

Distributed by



TECNOLOGÍA TOTAL
www.tecnologiatotal.net

CPV-4



CPV-2



Tinker & Rasor Cu-Cu/SO₄ half cell reference electrodes screw directly into the back of the meters!

Combine with optional extension handle for one hand operation.



PRODUCT DATA SHEET

MODEL CPV-2

Features:

- 10MΩ Impedance
- ± 3% of full scale
- 2v DC scale
- "AA" Batteries
- Color coded display

Construction:

Strong aluminum square tubing
Integrated circuits
Rugged analog meter

Applications:

- CP Potentials
- Structure to Earth
- Insulated Flanges

Dimensions:

3" Square (76mm)

MODEL CPV-4

Features:

- 11MΩ Impedance
- Digital LCD display (shows + or -)
- ±0.1% + last digit accuracy
- Dual scale, 0-.999v, 0-19.99v
- Includes reference cell and cables

Construction:

Durable die-cast aluminum case
Powder coat finish
Integrated circuits

Applications:

- CP Potentials
- Structure to Earth
- Structure to Structure

Dimensions:

4-5/8" x 3-5/8" x 2-3/16"
(117mm x 92mm x 59mm)

MODEL CPV-2 CP VOLTMETER



MODEL CPV-4 CP VOLTMETER

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA
SERVICE: **24-hour Turn-Around**
TERMS: Net30 Days, on approval of credit
WARRANTY: **90 Days**, parts and labor

AVAILABLE
FROM STOCK

