


# TINKER & RASOR

## REFERENCE ELECTRODES

HALF  
CELLS

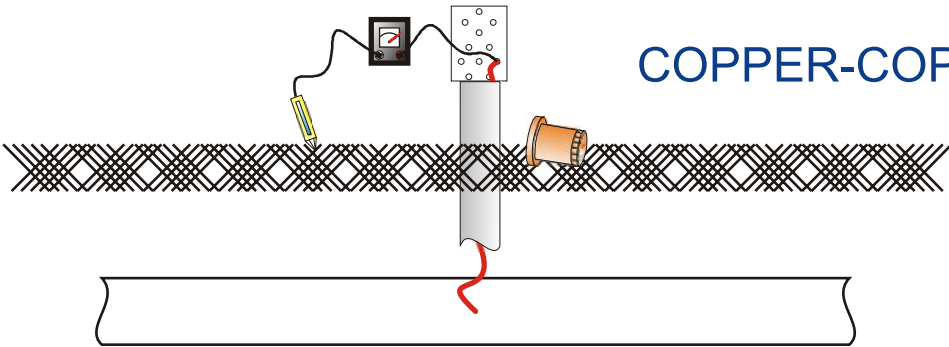

COPPER-COPPER/SULFATE  
(CuCu/SO<sup>4</sup>)

Portable Reference Electrodes, ready to use. Just add distilled water.




6" and 8" lengths available from stock  
Pencil -type can get into cracks in roadbeds  
Half cells screw directly into T&R CP Voltmeters  
Copper Sulfate charge included  
Extension handles available  
Waterproof Adapter

Tougher, longer lasting Tips  
Stronger body, No Window  
Porous plug, pre-saturated  
Pointed tip and flat tips available  
Large surface area available for use on concrete (Model 3-A)

**UPDATED**

Available accessories:

- Replacement crystals
- Anti-freeze solution
- Extension handles
- Lead cable

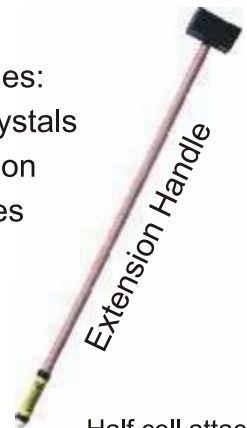

Half cell attached to T&R CP voltmeter. Extension handles also available.

Distributed by



TECNOLOGÍA TOTAL  
[www.tecnologiatotal.net](http://www.tecnologiatotal.net)

**AVAILABLE FROM STOCK!**

[www.teststations.com](http://www.teststations.com)

[www.detectron.com](http://www.detectron.com)



[www.tinker-rasor.com](http://www.tinker-rasor.com)

[Info@tinker-rasor.com](mailto:Info@tinker-rasor.com)

Tinker & Rasor quality is found in our products,  
our people and our customer service.



REFERENCE ELECTRODES



# TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

## PRODUCT DATA SHEET

MODELS 2-A, 3-A, 6-A, 6-B, 8-A and 8-B

### Features:

- Flat or Pointed Tips
- Tip grooves provide greater surface area
- Tips pre-saturated with copper-sulfate
- Knurled nut on 1/4" - 20 (except 2-A) threaded rod for easy lead connection (fork, ring, etc)
- Model 2-A, #6 knurled nut on 10-32 threaded copper rod.
- Charged with copper-sulfate
- Multiple Diameters and Lengths available

### Construction:

- New, tougher body
- Stronger, longer lasting tips
- O-ring seals

### Applications:

- Pipe to Soil potentials
- Close Interval Surveys
- Structure to Cell
- Lab use

### Recommendations:

Use with most CP Voltmeters  
Half cell models 3, 6 & 8 screw into back of  
T&R CPV-2 and CPV-4 CP Voltmeters

### Specifications:

High purity copper rod  
Copper-Sulfate crystals

### Dimensions:

- 2-A: 3/8" x 5-3/4"
- 3-A: 3" x 5"
- 6-A: 1-1/4" x 6"
- 6-B: 1-1/4" x 7"
- 8-A: 1-1/4" x 8"
- 8-B: 1-1/4" x 9"

DELIVERY: Immediately from STOCK  
EX-Works San Bernardino, CA USA

SERVICE: 24-hour Turn-Around

TERMS: Net30 Days, on approval of credit

WARRANTY: 90 Days, parts and labor



Half Cells, CP Voltmeters and Extension Handles



TECNOLOGÍA TOTAL  
[www.tecnologiatotal.net](http://www.tecnologiatotal.net)