



TECNOLOGÍA TOTAL
www.tecnologiatotal.net

TINKER & RASOR

PRODUCT DATA SHEET | EXPLORING ELECTRODES

FEATURES:

- Fits 1" on center terminal board
- Use on T-1, T-2, T-3, T-4, AG-1, AG-3
- Made of strong polycarbonate material
- Color coded and embossed with values
146-001: Orange, 0.001 Ohm, 25 Amp
146-002: Yellow, 0.01 Ohm, 8 Amp
146-003: Red, 0.1 Ohm, 2 Amp
- UV Stabilized color protection
- High impact resistance
- Fire resistant

CONSTRUCTION:

Polycarbonate material (Lexan®) gives great UV stabilization, fire protection and impact resistance.

Nickel plated brass for excellent corrosion resistance.

APPLICATIONS:

- Cathodic Protection connection point

RECOMMENDATIONS:

Use for determining current levels on CP systems, using Ohms Law.

ENVIRONMENT:

-76°C TO 122°C (-105°F TO 252°F)

DIMENSIONS:

Shunt Board: 2" x 0.938"
(134.6mm x 89.4mm)
Connection Points: 1" on center
Connection Legs: 0.5" length


DELIVERY: Immediately from STOCK
F.O.B. New Braunfels, TX USA

SERVICE: 24-hour Turn-Around

TERMS: Net 30 Days, on approval of credit

WARRANTY: 90 Days, parts and labor

TESTSTATIONS.COM

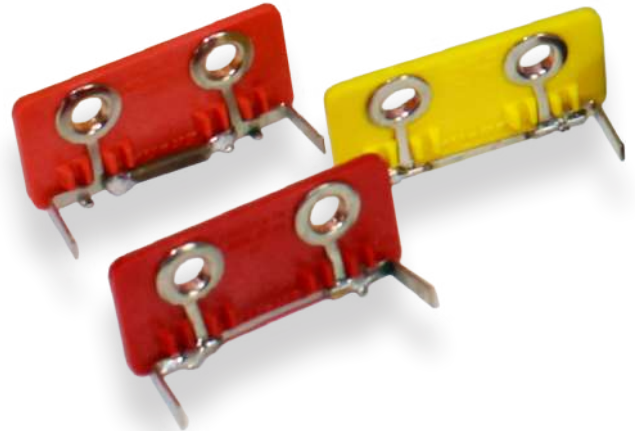

Tinker & Rasor Shunts have been designed for ease of use and long life.

Each shunt is color coded and embossed with Ohms of resistance and current capacity.

Fits on all T&R test stations.

Comes standard on the Model T-3 RB Resistance Bonding Test Station



AVAILABLE FROM STOCK

tinker-rasor.com